



# MERO 2


2" High-End Slim In-wall Speaker

## ► Features

- High-end in-wall speaker
- Slim grill with thin border (1 mm)
- Elegant & unobtrusive design
- Warm & true to nature sound
- Paintable front grill
- 2" Full range aluminum driver
- 10 Watt RMS power
- Gold plated spring clamp connectors
- Gold plated Gold-con™ connectors

## ► Applications

- Residential applications
- Retail stores & shopping centers
- Restaurants
- Bars
- Public buildings
- Offices

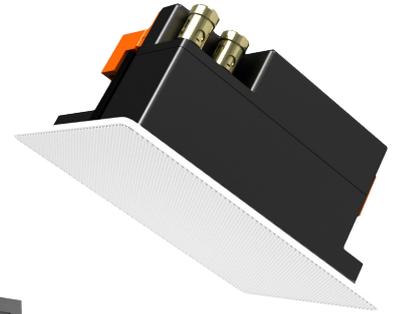

The MERO speakers will blend beautifully into any interior due to their nearly invisible design making only their extraordinary sound draw your attention. Their slim grill with very thin border of only 1 mm and limited grill depth extrudes the surface by only 3.2 mm when installed.

The Ultra-compact size enables the MERO2 smoothly integrate into any interior like no other loudspeaker. The outer dimensions only measure only 146 x 98 mm and the built-in depth which doesn't exceed 70 mm allows installation in any surface while being unobtrusive.

The sound originates from a 2" aluminum cone driver which provides a full-range, warm and detailed sound, with an improved response in the low frequencies due to a ported enclosure with closed back can. This way, a smooth sound reproduction with clear and crisp sound is guaranteed. An internal self-resetting network provides an optimal overload protection.

All these details share their part to the quality of the MERO 2, resulting in a highly reliable loudspeaker producing a pure sound with a maximum power handling of 20 Watt and an RMS power handling of 10 Watt.

An elegant look with minimal visual impact is created by the slim grill with very thin border, while lifetime stability, secure mounting and easy installation is guaranteed using the quick-fix mechanism which can be tightened by two screws and the Gold-Con™ spring clamp connectors. The grill is held in place using neodymium magnets, providing a quick and reliable assembly. Installation can be done both vertically and horizontally.

## ► Specifications

SYSTEM SPECIFICATIONS	
Speaker type	Full range
Max power	20 Watt
RMS power	10 Watt
Impedance	8 Ohm
Sensitivity (1W/1m)	83 dB
Sound pressure (max W/1m)	93 dB
Frequency response (±3 dB)	120 Hz - 20 kHz
Frequency range (-10 dB)	100 Hz - 20 kHz
Horizontal dispersion	150°
Vertical dispersion	150°
PRODUCT FEATURES	
Dimensions (Width x Height x Depth)	146 x 98 x 70 mm
Weight net	0.355 Kg
Connection	Gold-Con™ spring clamps
Drivers	2" Aluminium membrane
Construction	High quality ABS housing
Grill Type	Thin edged white grill
Cut-out measurement	128 x 80 mm
Built-in depth	70 mm
Mounting & handling	2 Screw quick-fixing mechanism
Available colours	Black frame & white grill
SHIPPING & ORDERING	
Packaging	Carton box
Shipping weight & volume	0.50 Kg ~ 0.002 Cbm
Accessories included	Cut-out template
Optional accessories	WTR06 6W 100V line transformer

\*AUDAC reserves the right to change specifications without notice: this is part of our policy to continually improve our products

## ► Architects' and Engineers' Specifications

---

The in-wall loudspeaker shall be a full range type fitted in a closed ported enclosure and equipped with a 2" aluminum cone driver with neodymium magnet.

It shall have an RMS power handling of 10 Watt with a maximum power handling of 20 Watt and the frequency response ( $\pm 3$  dB) shall range from 120 Hz to 20 kHz. The sensitivity shall be 83 dB when measuring with an input signal of 1 Watt at a distance of 1 meter, while the maximum continuous sound pressure level shall be 93 dB.

The loudspeaker shall have an impedance of 8 Ohm and shall contain an internal self-resetting network which provides an optimal overload protection.

The speakers construction shall be made out of high-quality ABS with a black colour and textured matt surface finishing. A 2-screw quick-fixing mechanism shall allow assembly of the speaker into a ceiling in a quick and simple way while the connectivities are performed using Gold-Con™ spring clamp connectors.

To make the loudspeaker nearly invisible when mounted, the speaker shall have a white grill with a very thin border of 1 mm which extrudes the ceiling surface by only 3.2 mm. This grill shall be constructed of steel which can be painted to make it blend-in with any environment. The assembly and disassembly of the grill shall be very simple thanks to the neodymium magnets holding it in place.

The speaker shall have a width of 98 mm, a height of 146 mm and a depth of 70 mm and shall not exceed 0.335 kg. The speaker shall fit in a mounting hole of 128 mm x 80 mm and a build-in depth of 70 mm.

## ► Technical drawing

---

