

FO S112

Article number: (black) 1008002, (white/RAL*) 1008094

Very compact subwoofer with 12" woofer, 2.5" voice coil and 50 Hz tuning frequency. Ideal low-end support with powerful bass and high sound pressure as a system subwoofer or surround LFE for installations with compact speakers like the FO 5.

Easy to integrate in environments with limited space. The cable feed-through on the rear, with cut-outs to the left, right or bottom, allows cables to be routed close to the wall, meaning the subwoofer can be placed against the wall without gaps.


A secondary grille protects the bass reflex port from accidental or deliberate insertion of foreign objects. A ball-impact resistance certificate in line with DIN 18032-3 is provided for installations in sports facilities.

Features:


- Compact, powerful subwoofer for modern music styles with flow-optimized bass reflex port
- Support for Lab.Gruppen IPX and LEA Professional with DSP Presets and other DSP platforms with Filter Sheets in open table format
- Extremely solid enclosures in acoustically beneficial MDF and foam-backed grille with additional steel reinforcements
- Designed with 2 lockable Neutrik Speakon sockets
- Optimized for floor installation with practical cut-outs on the back to facilitate installation close to the wall and routing of the cable
- Secondary grille protects the bass reflex port from accidental or deliberate insertion of foreign objects
- Simulation data for EASE and EASE FOCUS for predicting sound distribution and combination with other HK Audio mid/high units
- Certified ball-impact resistant in line with DIN 18032-3




FO S112 Electroacoustic measurements

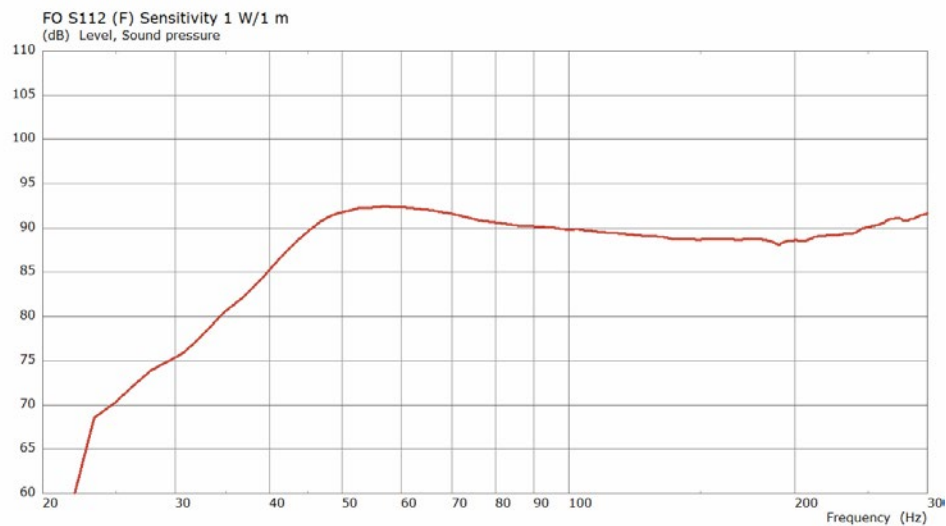


Frequency response, without DSP

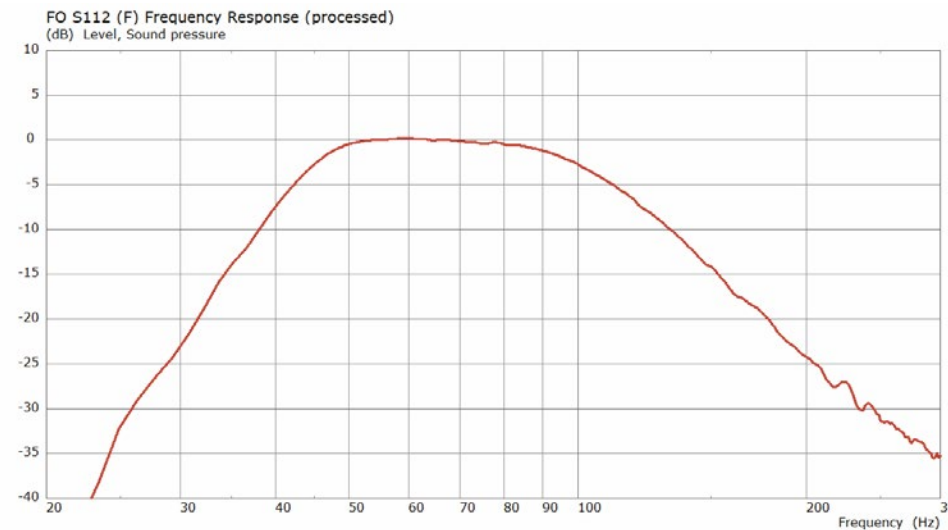


Frequency response with DSP preset

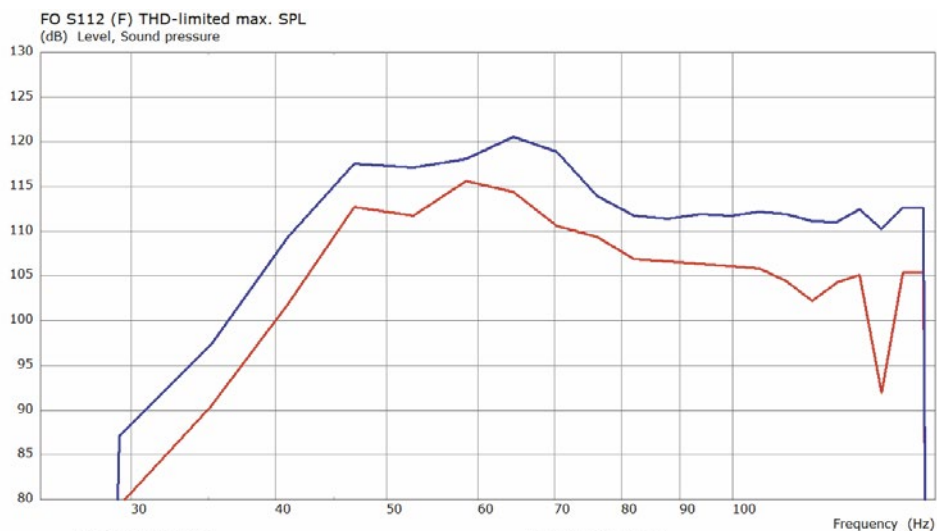

Max. SPL (red = 3 % THD, blue = 10 % THD)

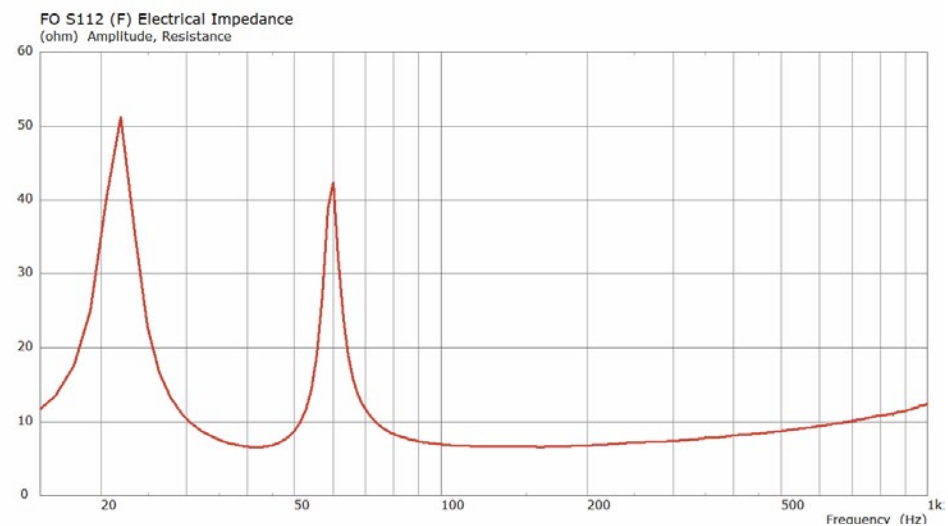

Electrical impedance

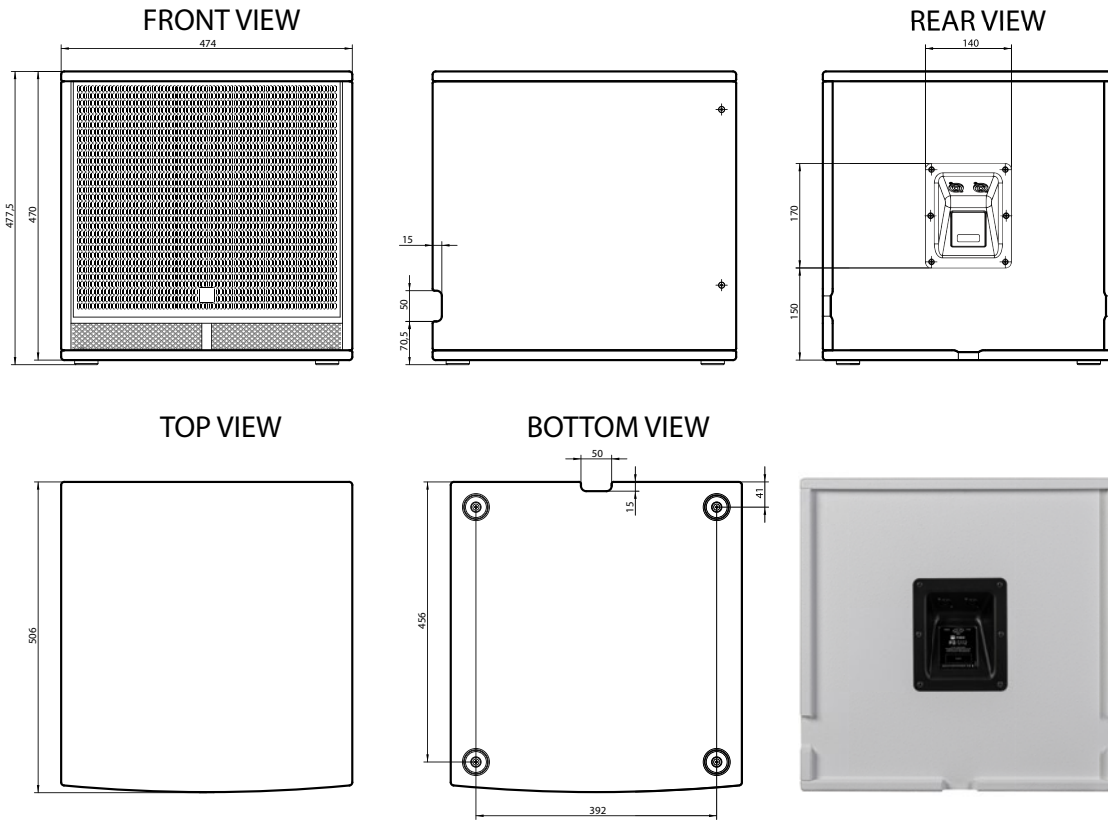

HK Audio
Postfach 1509
66595 St. Wendel, Germany

info@hkaudio.com
fax +49-68 51-905 215
www.hkaudio.com
D-3279