



Classic series

★★★★★



This catalogue is made with care and attention for details and is as complete as possible on publication date. Due to the fact our products, documentation and products range are continuously improved and expanded, updates may have occurred since publication date.

To stay up to date with the latest improvements and additions or to obtain additional product information, please visit the product page on our website procab.be

INDEX

Video premade cables	9
Data premade cables	17
Audio premade cables	25
Adapters	41

PROCAB CLASSIC SERIES CATALOG

The Classic premade series from PROCAB offers a stunning line of cables and adapters that will satisfy any AV integrator. Not only the design but also the quality of the cables themselves is unheard of in its price range. The advantage of gold plated contacts and the connectors that are molded firmly on the cable make this the ideal solution for fixed installations and mobile use in any audio, video or data project.

LSHF

LSHF stands for Low Smoke, Halogen Free. This term refers to Halogen free flame retardant thermoplastic material used as a sheathing compound in cables. In the event of a fire or when exposed to high levels of heat, the chemicals in the jacket remove heat from the flame, whilst the reaction produces water as a by-product to help quench the flame. As a result, the cable will emit very low levels of smoke and non-toxic levels of poisonous halogen gases.




CLASSIC SHRINK SLEEVE

A lot of Classic cables are equipped with a shrink sleeve. These shrink sleeves are meant to protect a company logo or a **cable tag**. These sleeves are factory installed for the purpose of placing a cable tag without the need to detach the connector. The **heat shrink** tubing can be easily shrunk by means of a heat gun. The sleeves are not lined with glue and have a **length of 60mm**.



UV-resistant
length : 60 mm

For the most optimal care of your cable connection the sleeve can be placed about 30 cm from the connector.

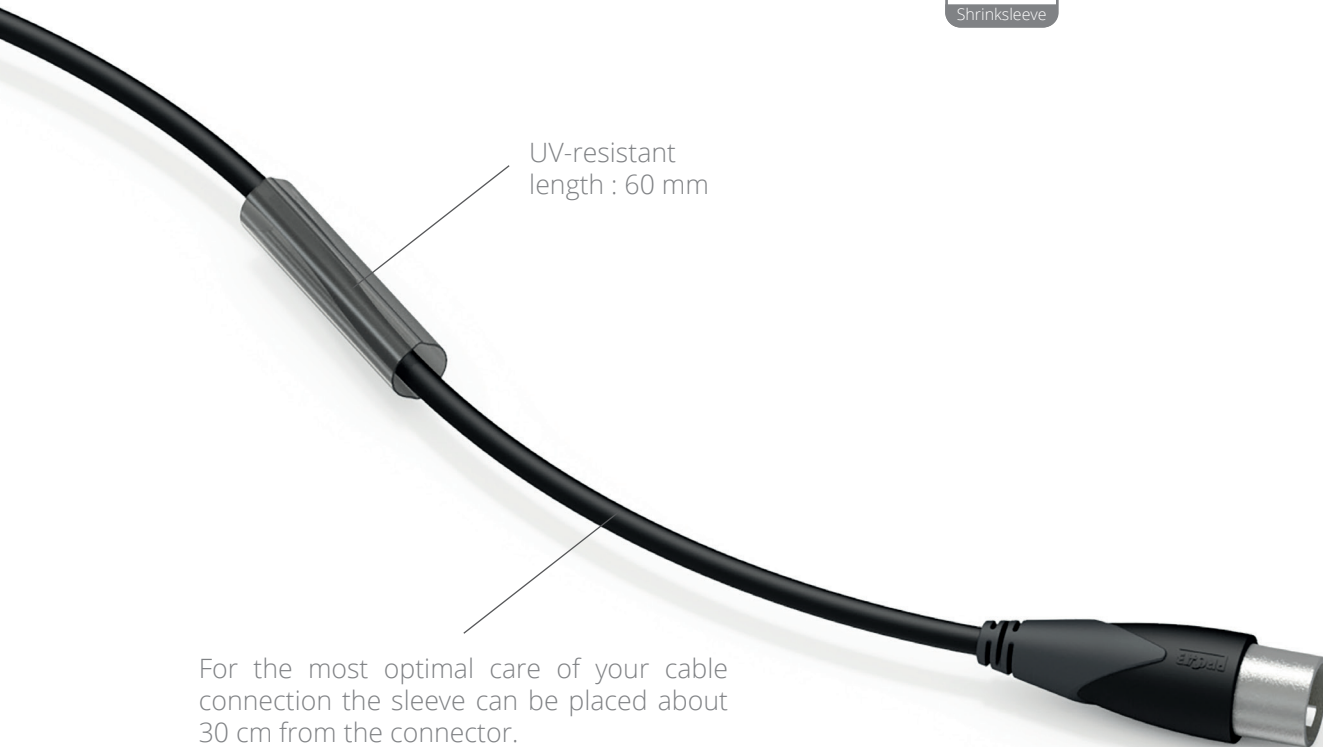

FLEXIBILITY

Even though the Classic series is mostly used for fixed installations, they excel in their flexibility and build quality. This makes them also an excellent partner for mobile use.



CLASSIC'S REACH

The Classic series cables and connectors are made for a wide range of applications and excel in their use. They offer a solution for audio, video broadcast, light control or network connectivity that you can rely on.



OXYGEN FREE COPPER

All copper conductors that are used in the Classic series cables are 99.99% oxygen free copper that enhances conductivity which improves the audio transmission.



CLASSIC ENTITY

Firmly molded connectors form the basis of the Classic series. These two color, one robust and one flexible rubber part connectors are clearly recognizable. This design is extended throughout the entire Classic series.

GOLD PLATED

The complete line of connectors in the Classic series are fitted with gold plated contacts that prevent oxidation and maintain performance after years of use.



Video cables



CLASSIC SERIES VIDEO CABLES

The PROCAB Classic series offers video connection cables meeting the highest requirements for current state-of-the-art video applications, including connection cables for both analog and digital video transmission. For every application where a video source device such as an HD-camera, media-server or Blu-ray player needs to be connected to a video display device such as a monitor, beamer or flatscreen TV, PROCAB offers the best suited connection solution.



HDMI

HDMI (High-Definition Multimedia Interface) is an audio/video interface for transferring uncompressed video data and compressed or uncompressed digital audio data from an HDMI-compliant source device to a compatible monitor, video projector or digital television. With the PROCAB HDMI cables you can easily transmit an HD video signal up to 20 meters and even 4K Ultra HD up to 15 meters.

4K

4K is also known as UHD (Ultra-High Definition). This is an overarching term that also encompasses several resolution sizes which offer more pixels than regular HDTV. 4K uses at least 4 times more pixels than the regular 1080 pixel HD resolutions thus the name 4K. The ultimate result of this increased pixel breakdown is an image clarity that goes well beyond conventional 1080 pixel HD resolution and presents more vibrant, varied and realistic colors as well as much higher frame rates.



CLV100



- > Audio return channel
- > HDMI with Ethernet
- > Triple shielding
- > Standard speed up to 1080i
- > High speed up to 1080p

DESCRIPTION

HDMI A male to
HDMI A male

High speed HDMI with Ethernet Channel

Code	Length	AWG
CLV100/1.5	1.5 m	28
CLV100/3	3 m	28
CLV100/5	5 m	24
CLV100/7.5	7.5 m	24
CLV100/10	10 m	24
CLV100/15	15 m	24
CLV100/20	20 m	24

SAME CONNECTIVITY

★★★★★ Basic series : BSV110

CABLE SPECIFICATIONS

TYPE : CDD124

- > Flexible PVC Jacket
- > Oxygen free copper conductors
- > Triple shielding (2 x Al-foil + Braiding)



< 10 m



≥ 10 m

CLV200



- > Audio return channel
- > HDMI with Ethernet
- > Triple shielding
- > Standard speed up to 1080i
- > High speed up to 1080p

DESCRIPTION

HDMI A male to
HDMI A male

High speed HDMI with Ethernet Channel

Code	Length
CLV200/5	5 m
CLV200/7.5	7.5 m
CLV200/10	10 m
CLV200/15	15 m
CLV200/20	20 m

SAME CONNECTIVITY

★★★★★ Basic series : BSV110

CABLE SPECIFICATIONS

TYPE : CDD124(HF)

- > Low smoke & halogen free jacket
- > Oxygen free copper conductors
- > Triple shielding (2 x Al-foil + Braiding)



< 10 m



≥ 10 m

CLV104K



DESCRIPTION

Active High Speed HDMI cable with Ethernet

Code	Length
CLV104K/10	10 m
CLV104K/15	15 m

CABLE SPECIFICATIONS

TYPE : CDD124

- › Integrated chipset for 4K transmission up to 15 meters
- › Flexible PVC Jacket
- › 24 AWG thin and dense stranded conductors
- › Ø 8.8 mm outer diameter
- › Oxygen free copper conductor
- › Triple shielding



RedMere

The HDMI cables that have the RedMere certificate are equipped with a semiconductor device that allows higher speeds and greater distances. This makes it possible to transmit a 4K resolution up to 15 meter (49 feet).

CLV114



DESCRIPTION

SVGA male to SVGA male

Code	Length
CLV114/1.5	1.5 m
CLV114/3	3 m
CLV114/5	5 m
CLV114/7.5	7.5 m
CLV114/10	10 m
CLV114/15	15 m
CLV114/25	25 m
CLV114/30	30 m

CABLE SPECIFICATIONS

TYPE : SVGA214

- › Flexible PVC Jacket
- › 28 AWG thin and dense stranded conductors
- › Ø 7.5 mm outer diameter
- › Oxygen free copper conductors
- › Double Al foil shielding



- › 5 Coaxial conductors carrying the RGBHV Video
- › All pins are connected
- › Supports Extended Display Identification Data (EDID)



CLV115



- > 5 Coaxial conductors carrying the RGBHV Video
- > All pins are connected
- > Supports Extended Display Identification Data (EDID)

DESCRIPTION

SVGA & mini jack male stereo to
SVGA & mini jack male stereo

Code	Length
CLV115/1.5	1.5 m
CLV115/3	3 m
CLV115/5	5 m
CLV115/10	10 m
CLV115/15	15 m
CLV115/20	20 m
CLV115/25	25 m
CLV115/30	30 m

CABLE SPECIFICATIONS TYPE : SVGA215

- > Integrated stereo audio section
- > Flexible PVC Jacket
- > 28 AWG thin and dense stranded conductors
- > Ø 7.5 mm outer diameter
- > Oxygen free copper conductors
- > Double Al foil shielding

Mini Jack cable length:

Projector side : 15 cm
Computer side : 50 cm

CLV140



DESCRIPTION

DVI D male to
DVI D male - Dual link

Code	Length
CLV140/1.5	1.5 m
CLV140/3	3 m
CLV140/5	5 m
CLV140/10	10 m

CABLE SPECIFICATIONS TYPE : CDH126

- > Flexible PVC Jacket
- > 26 AWG thin and dense stranded conductors
- > Ø 11.0 mm outer diameter
- > Oxygen free copper conductors
- > Triple shielding (2 x Al-foil + Braiding)

CLV156



DESCRIPTION

BNC male to
BNC male



Code	Length
CLV156/0.5	0.5 m
CLV156/1	1 m
CLV156/1.5	1.5 m
CLV156/3	3 m
CLV156/5	5 m
CLV156/10	10 m
CLV156/15	15 m
CLV156/20	20 m

CABLE SPECIFICATIONS TYPE : CXV150

- > Flexible PVC Jacket
- > 26 AWG thin and dense stranded conductors
- > Ø 5.0 mm outer diameter
- > Oxygen free copper conductors
- > Braided bare copper shielding

CLV158



DESCRIPTION

BNC male to
BNC male



Code	Length
CLV158/0.5	0.5 m
CLV158/1	1 m
CLV158/1.5	1.5 m
CLV158/3	3 m
CLV158/5	5 m
CLV158/10	10 m
CLV158/15	15 m
CLV158/20	20 m

CABLE SPECIFICATIONS TYPE : CXV175

- > Flexible PVC Jacket
- > 24 AWG solid conductor
- > Ø 5.0 mm outer diameter
- > Oxygen free copper conductor
- > Braided bare copper shielding

SAME CONNECTIVITY

★★★★★ Prime series : PRV158



CLV160



DESCRIPTION

DVI D male to
HDMI A male

Code	Length
CLV160/1.5	1.5 m
CLV160/3	3 m
CLV160/5	5 m
CLV160/10	10 m

CABLE SPECIFICATIONS TYPE : CDH124

- > Flexible PVC Jacket
- > 24 AWG thin and dense stranded conductors
- > Ø 8.8 mm outer diameter
- > Oxygen free copper conductor
- > Triple shielding

Data cables



CLASSIC SERIES DATA CABLES

In order to achieve a digital signal transmission between several devices, communication should be made according to standards. Several standards are defined, each especially designed for use with specific applications. The two most important standards for professional stage and broadcast use in the field of audio and video are the AES/EBU and the DMX standards.

AES/EBU standard

The **AES/EBU standard** is a standard which is designed to carry digital audio signals between devices, developed by the Audio Engineering Society and European Broadcasting Unit. There are three different kinds of mediums that can be used for transferring digital audio signals according to the AES/EBU standard:



Balanced 3 conductor

110 Ohm twisted pair cabling with an XLR connector. (This kind of cables is available in our Classic series).



Unbalanced 2 conductor

75 Ohm coaxial cable with an RCA connector. It uses the same patching, cabling and infrastructure as analog and digital video interconnections. A BNC variant also exists. (This kind of cables is available in our Classic series)



Optical

Optical fiber, usually plastic but occasionally glass, with an F05 connector, also known as TOSLINK or S/PDIF. (This kind of cables is available in our Classic series)



Updated XLR connector design

To avoid unwanted disconnections between male and female XLR connectors, a notch has been added to the male connector. This change in design applies to all male XLR connectors in the PROCAB range.

Digital Multiplexed (DMX) standard

Digital Multiplexed (DMX) is a serial communication protocol which is based on RS-485 and is commonly used to control stage lighting and effects. It was originally intended as a standardized method for controlling light dimmers, but, through further developments it became the major way to control special effects, moving effects and many more devices in the field of on- stage and entertainment technologies.

CLD400



DESCRIPTION

Midi male to
Midi male

Code	Length
CLD400/0.5	0.5 m
CLD400/1.5	1.5 m
CLD400/3	3 m
CLD400/5	5 m
CLD400/10	10 m

SAME CONNECTIVITY

★★★★★ Basic series : CAM400

CABLE SPECIFICATIONS TYPE : MIDI400

- > Flexible PVC Jacket
- > 26 AWG thin and dense stranded conductors
- > Ø 6.0 mm outer diameter
- > Oxygen free copper conductors
- > Double shielding (Braiding + Al foil)

CLD500



DESCRIPTION

CAT5E UTP cable
with RJ45 connectors

Code	Length
CLD500/0.5	0.5 m
CLD500/1	1 m
CLD500/1.5	1.5 m
CLD500/3	3 m
CLD500/5	5 m
CLD500/10	10 m
CLD500/15	15 m
CLD500/20	20 m

SAME CONNECTIVITY

★★★★★ Prime series : PRD500

CABLE SPECIFICATIONS TYPE : CAT50B

- > Flexible PVC Jacket
- > Double extrusion for flexible & solid feel
- > 24 AWG thin and dense stranded conductors
- > Ø 7.0 mm outer diameter
- > Oxygen free copper conductors

CLD600




DESCRIPTION

USB 2.0 A to
USB 2.0 A

Code	Length
CLD600/1.5	1.5 m
CLD600/3	3 m
CLD600/5	5 m

CABLE SPECIFICATIONS TYPE : CDD600

- > Flexible PVC Jacket
- > Ø 4.0 mm outer diameter
- > Oxygen free copper conductors
- > Double shielding (Braiding + Al foil)



CLD605



DESCRIPTION


USB 3.0 A to
USB 3.0 A

Code	Length
CLD605/1.5	1.5 m



CABLE SPECIFICATIONS TYPE : CDD605

- › Flexible PVC Jacket
- › 28 AWG (data) & 24 AWG (power) thin and dense stranded conductors
- › Ø 5.6 mm outer diameter
- › Oxygen free copper conductors
- › Triple shielding (2 x Al-foil + Braiding)



CLD610



DESCRIPTION


USB 2.0 A to
USB B

Code	Length
CLD610/1.5	1.5 m
CLD610/3	3 m
CLD610/5	5 m



CABLE SPECIFICATIONS TYPE : CDD600

- › Flexible PVC Jacket
- › Ø 4.0 mm outer diameter
- › Oxygen free copper conductors
- › Double shielding (Braiding + Al foil)



CLD612



DESCRIPTION


USB 2.0 A to
USB micro A

Code	Length
CLD612/1.5	1.5 m



CABLE SPECIFICATIONS TYPE : CDD600

- › Flexible PVC Jacket
- › Ø 4.0 mm outer diameter
- › Oxygen free copper conductors
- › Double shielding (Braiding + Al foil)



CLD614



DESCRIPTION


USB 2.0 A to
USB micro B

Code	Length
CLD614/1.5	1.5 m



CABLE SPECIFICATIONS TYPE : CDD600

- > Flexible PVC Jacket
- > Ø 4.0 mm outer diameter
- > Oxygen free copper conductors
- > Double shielding (Braiding + Al foil)



CLD615



DESCRIPTION


USB 2.0 A to
USB mini B

Code	Length
CLD615/1.5	1.5 m



CABLE SPECIFICATIONS TYPE : CDD600

- > Flexible PVC Jacket
- > Ø 4.0 mm outer diameter
- > Oxygen free copper conductors
- > Double shielding (Braiding + Al foil)



CLD625



DESCRIPTION

Toslink to
Toslink

Code	Length
CLD625/1.5	1.5 m
CLD625/3	3 m



CABLE SPECIFICATIONS TYPE : COP15

- > Flexible PVC Jacket
- > Ø 0.98 mm PMMA Optical fiber
- > Fluorinated polymer clad
- > Ø 4.0 mm outer diameter

CLD953



DESCRIPTION

AES 110 Ohm digital audio 3 pole XLR male to 3 pole XLR female

Code	Length
CLD953/0.5	0.5 m
CLD953/1	1 m
CLD953/1.5	1.5 m
CLD953/3	3 m
CLD953/5	5 m
CLD953/10	10 m
CLD953/15	15 m
CLD953/20	20 m

SAME CONNECTIVITY

★★★★★ Prime series : PRD953

CABLE SPECIFICATIONS TYPE : DMX32

- > Flexible PVC Jacket
- > 26 AWG thin and dense stranded conductors
- > Ø 6.0 mm outer diameter
- > Oxygen free copper conductors
- > Double shielding (Al-foil + Braiding)

CLD955



DESCRIPTION

AES 110 Ohm digital audio 5 pole XLR male to 5 pole XLR female

Code	Length
CLD955/0.5	0.5 m
CLD955/1	1 m
CLD955/1.5	1.5 m
CLD955/3	3 m
CLD955/5	5 m
CLD955/10	10 m
CLD955/15	15 m
CLD955/20	20 m

SAME CONNECTIVITY

★★★★★ Prime series : PRD955

CABLE SPECIFICATIONS TYPE : DMX52

- > Flexible PVC Jacket
- > 26 AWG thin and dense stranded conductors
- > Ø 6.0 mm outer diameter
- > Oxygen free copper conductors
- > Double shielding (Al-foil + Braiding)

FBS125



DESCRIPTION

Duplex Fiber connection cable ST/PC


Code	Length
FBS125/1	1 m
FBS125/2	2 m
FBS125/3	3 m
FBS125/5	5 m
FBS125/10	10 m
FBS125/15	15 m
FBS125/20	20 m
FBS125/30	30 m

HIGHLIGHTS

- › Low smoke & halogen free outer jacket
- › Duplex multimode 62.5/125µm fiber
- › ST/PC connectors fitted
- › Ø 3 x 6 mm outer diameter
- › TIA/EIA-568B.3 & Bellcore GR-409 compliant

Code	Length
FBS125/40	40 m
FBS125/50	50 m
FBS125/60	60 m
FBS125/70	70 m
FBS125/80	80 m
FBS125/90	90 m
FBS125/100	100 m

FBL130

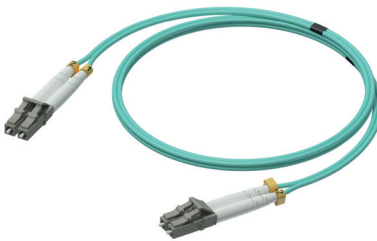

DESCRIPTION

Fiber optic LC/PC to LC/PC duplex

Code	Length
FBL130/0.5	0.5 m
FBL130/1	1 m
FBL130/1.5	1.5 m
FBL130/3	3 m

HIGHLIGHTS

- › Low smoke & halogen free outer jacket
- › Duplex multimode 50/125 OM3 µm fiber
- › LC/PC connectors fitted
- › Ø 2 x 4 mm outer diameter
- › TIA/EIA-568B.3 & Bellcore GR-409 compliant

Audio cables



CLA530




DESCRIPTION

Terminal block to
Terminal block 2 pole - 5.08 mm

Code	Length
CLA530/0.5	0.5 m
CLA530/1	1 m
CLA530/1.5	1.5 m
CLA530/2	2 m

CABLE SPECIFICATIONS TYPE : LS10

- > Flexible PVC Jacket
- > 17 AWG (1.0 mm²) thin and dense stranded conductors
- > Ø 6.5 mm outer diameter
- > Oxygen free copper



CLA590



DESCRIPTION

6.3 mm Jack male to
6.3 mm Jack male

Code	Length
CLA590/10	10 m

SAME CONNECTIVITY

★★★★★ Basic series : CAB590



CABLE SPECIFICATIONS TYPE : LS10

- > Flexible PVC Jacket
- > 17 AWG (1.0 mm²) thin and dense stranded conductors
- > Ø 6.5 mm outer diameter
- > Oxygen free copper



CLA591



DESCRIPTION

6.3 mm Jack male to
XLR female

Code	Length
CLA591/10	10 m

SAME CONNECTIVITY

★★★★★ Basic series : CAB591



CABLE SPECIFICATIONS TYPE : LS10

- > Flexible PVC Jacket
- > 17 AWG (1.0 mm²) thin and dense stranded conductors
- > Ø 6.5 mm outer diameter
- > Oxygen free copper





CLA595



DESCRIPTION

XLR male to
XLR female

Code	Length
CLA595/10	10 m

SAME CONNECTIVITY

★★★★★ Basic series : CAB595



CABLE SPECIFICATIONS TYPE : LS10

- › Flexible PVC Jacket
- › 17 AWG (1.0 mm²) thin and dense stranded conductors
- › Ø 6.5 mm outer diameter
- › Oxygen free copper



CLA600



DESCRIPTION

6.3 mm Jack male to
6.3 mm Jack male

Code	Length
CLA600/1.5	1.5 m
CLA600/3	3 m
CLA600/5	5 m
CLA600/10	10 m

SAME CONNECTIVITY

★★★★★ Basic series : CAB600

★★★★★ Prime series : PRA600



CABLE SPECIFICATIONS TYPE : MC205

- › Flexible PVC Jacket
- › 26 AWG thin and dense stranded conductors
- › Ø 6.0 mm outer diameter
- › Oxygen free copper conductors
- › Braided shielding



CLA603



DESCRIPTION

2 x 6.3 mm Jack male to
2 x 6.3 mm Jack male angled

Code	Length
CLA603/3	3 m
CLA603/5	5 m
CLA603/10	10 m



CABLE SPECIFICATIONS TYPE : SIG44

- › Flexible PVC Jacket
- › 28 AWG thin and dense stranded conductors
- › Ø 4 x 8 mm outer diameter
- › Oxygen free copper conductors
- › Spiral shielding



CLA610



DESCRIPTION

6.3 mm Jack male stereo to
6.3 mm Jack male stereo

Code	Length
CLA610/1.5	1.5 m
CLA610/3	3 m
CLA610/5	5 m
CLA610/10	10 m

SAME CONNECTIVITY

★★★★★ Basic series : CAB610
★★★★★ Prime series : PRA610

CABLE SPECIFICATIONS TYPE : MC104

- > Flexible PVC Jacket
- > 28 AWG thin and dense stranded conductors
- > Ø 6.0 mm outer diameter
- > Oxygen free copper conductors
- > Braided shielding



CLA631



DESCRIPTION

2 x 6.3 mm Jack male to
2 x RCA / Cinch male


Code	Length
CLA631/1	1 m
CLA631/1.5	1.5 m
CLA631/3	3 m
CLA631/5	5 m

SAME CONNECTIVITY

★★★★★ Basic series : CAB631

CABLE SPECIFICATIONS TYPE : SIG44

- > Flexible PVC Jacket
- > 28 AWG thin and dense stranded conductors
- > Ø 4 x 8 mm outer diameter
- > Oxygen free copper conductors
- > Spiral shielding



CLA650



DESCRIPTION

6.3 mm guitar Jack male to
6.3 mm Jack male angled

Code	Length
CLA650/1.5	1.5 m
CLA650/3	3 m
CLA650/5	5 m

CABLE SPECIFICATIONS TYPE : MC205

- > Flexible PVC Jacket
- > 26 AWG thin and dense stranded conductors
- > Ø 6.0 mm outer diameter
- > Oxygen free copper conductors
- > Braided shielding





CLA701



DESCRIPTION

2 x XLR male to
2 x RCA / Cinch male


Code	Length
CLA701/1.5	1.5 m
CLA701/3	3 m

SAME CONNECTIVITY

★★★★★ Basic series : CAB701

CABLE SPECIFICATIONS TYPE : SIG44

- › Flexible PVC Jacket
- › 28 AWG thin and dense stranded conductors
- › Ø 4 x 8 mm outer diameter
- › Oxygen free copper conductors
- › Spiral shielding



CLA703



DESCRIPTION

XLR male to
2 x RCA / Cinch male


Code	Length
CLA703/1.5	1.5 m
CLA703/3	3 m
CLA703/5	5 m
CLA703/10	10 m

SAME CONNECTIVITY

★★★★★ Basic series : CAB703

CABLE SPECIFICATIONS TYPE : MC703

- › Flexible PVC Jacket
- › 28 AWG thin and dense stranded conductors
- › Ø 5.0 mm outer diameter
- › Oxygen free copper conductors
- › Spiral shielding



CLA705



DESCRIPTION

2 x XLR female to
2 x RCA / Cinch male


Code	Length
CLA705/1.5	1.5 m
CLA705/3	3 m

SAME CONNECTIVITY

★★★★★ Basic series : CAB705

CABLE SPECIFICATIONS TYPE : SIG44

- › Flexible PVC Jacket
- › 28 AWG thin and dense stranded conductors
- › Ø 4 x 8 mm outer diameter
- › Oxygen free copper conductors
- › Spiral shielding



CLA707



DESCRIPTION

2 x XLR female to
2 x 6.3 mm Jack male


Code	Length
CLA707/1.5	1.5 m
CLA707/3	3 m

SAME CONNECTIVITY

★★★★★ Basic series : CAB707

CABLE SPECIFICATIONS TYPE : SIG44

- > Flexible PVC Jacket
- > 28 AWG thin and dense stranded conductors
- > Ø 4 x 8 mm outer diameter
- > Oxygen free copper conductors
- > Spiral shielding



CLA708



DESCRIPTION

2 x XLR male to
2 x 6.3 mm Jack male


Code	Length
CLA708/1.5	1.5 m
CLA708/3	3 m

SAME CONNECTIVITY

★★★★★ Basic series : CAB708

CABLE SPECIFICATIONS TYPE : SIG44

- > Flexible PVC Jacket
- > 28 AWG thin and dense stranded conductors
- > Ø 4 x 8 mm outer diameter
- > Oxygen free copper conductors
- > Spiral shielding



CLA709



DESCRIPTION

6.3 mm Jack male stereo to
XLR male and XLR female


Code	Length
CLA709/1	1 m
CLA709/1.5	1.5 m
CLA709/2	2 m
CLA709/3	3 m

SAME CONNECTIVITY

★★★★★ Basic series : CAB709

CABLE SPECIFICATIONS TYPE : SIG155

- > Flexible PVC Jacket
- > 28 AWG thin and dense stranded conductors
- > Ø 4 x 8 mm outer diameter
- > Oxygen free copper conductors
- > Spiral shielding





CLA710



DESCRIPTION

2 x XLR female to
2 x XLR male


Code	Length
CLA710/0.5	0.5 m
CLA710/1.5	1.5 m
CLA710/3	3 m

SAME CONNECTIVITY

★★★★★ Basic series : CAB710

CABLE SPECIFICATIONS TYPE : SIG55

- > Flexible PVC Jacket
- > 28 AWG thin and dense stranded conductors
- > Ø 5 x 10 mm outer diameter
- > Oxygen free copper conductors
- > Braided shielding



CLA711



DESCRIPTION

3.5 mm Jack male stereo to
2 x RCA / Cinch male

Code	Length
CLA711/1.5	1.5 m
CLA711/3	3 m
CLA711/5	5 m
CLA711/10	10 m
CLA711/15	15 m
CLA711/20	20 m

SAME CONNECTIVITY

★★★★★ Basic series : CAB711
Smart series : CIP712

CABLE SPECIFICATIONS TYPE : SIG144

- > Flexible PVC Jacket
- > 28 AWG thin and dense stranded conductors
- > Ø 4.0 mm outer diameter
- > Oxygen free copper conductors
- > Spiral shielding



CLA712



DESCRIPTION

3.5 mm Jack male stereo to
2 x XLR male


Code	Length
CLA712/1.5	1.5 m
CLA712/3	3 m

SAME CONNECTIVITY

★★★★★ Basic series : CAB712

CABLE SPECIFICATIONS TYPE : SIG144

- > Flexible PVC Jacket
- > 28 AWG thin and dense stranded conductors
- > Ø 4.0 mm outer diameter
- > Oxygen free copper conductors
- > Spiral shielding



CLA713



DESCRIPTION

3.5 mm Jack male stereo to
2 x 6.3 mm Jack male


Code	Length
CLA713/1.5	1.5 m
CLA713/3	3 m

SAME CONNECTIVITY

★★★★★ Basic series : CAB713

CABLE SPECIFICATIONS TYPE : SIG144

- › Flexible PVC Jacket
- › 28 AWG thin and dense stranded conductors
- › Ø 4.0 mm outer diameter
- › Oxygen free copper conductors
- › Spiral shielding



CLA716



DESCRIPTION

3.5 mm Jack male stereo to
3.5 mm Jack male stereo

Code	Length
CLA716/0.7	0.75 m
CLA716/1.5	1.5 m
CLA716/3	3 m
CLA716/5	5 m
CLA716/10	10 m
CLA716/15	15 m

SAME CONNECTIVITY

Smart series : CIP708

CABLE SPECIFICATIONS TYPE : SIG144

- › Flexible PVC Jacket
- › 28 AWG thin and dense stranded conductors
- › Ø 4.0 mm outer diameter
- › Oxygen free copper conductors
- › Spiral shielding



CLA718



DESCRIPTION

3.5 mm Jack male stereo to
3.5 mm Jack male stereo angled

Code	Length
CLA718/1.5	1.5 m
CLA718/3	3 m

CABLE SPECIFICATIONS TYPE : SIG144

- › Flexible PVC Jacket
- › 28 AWG thin and dense stranded conductors
- › Ø 4.0 mm outer diameter
- › Oxygen free copper conductors
- › Spiral shielding





CLA719



DESCRIPTION

6.3 mm Jack male stereo to
2 x RCA / Cinch male


Code	Length
CLA719/1.5	1.5 m
CLA719/3	3 m

SAME CONNECTIVITY

★★★★★ Basic series : CAB719

CABLE SPECIFICATIONS TYPE : SIG144

- › Flexible PVC Jacket
- › 28 AWG thin and dense stranded conductors
- › Ø 4.0 mm outer diameter
- › Oxygen free copper conductors
- › Spiral shielding



CLA720




DESCRIPTION

6.3 mm Jack male stereo angled to
2 x 6.3 mm Jack female stereo

Code	Length
CAB720/1.5	1.5 m

CABLE SPECIFICATIONS TYPE : MC104

- › Flexible PVC Jacket
- › 28 AWG thin and dense stranded conductors
- › Ø 6.0 mm outer diameter
- › Oxygen free copper conductors
- › Braided shielding



CLA721



DESCRIPTION

6.3 mm Jack male stereo to
2 x 6.3 mm Jack male


Code	Length
CLA721/1.5	1.5 m
CLA721/3	3 m

SAME CONNECTIVITY

★★★★★ Basic series : CAB721

CABLE SPECIFICATIONS TYPE : SIG144

- › Flexible PVC Jacket
- › 28 AWG thin and dense stranded conductors
- › Ø 4.0 mm outer diameter
- › Oxygen free copper conductors
- › Spiral shielding



CLA723



DESCRIPTION

XLR female to
6.3 mm Jack male stereo

Code	Length
CLA723/1.5	1.5 m

SAME CONNECTIVITY

★★★★★ Basic series : CAB723
★★★★★ Prime series : PRA726

CABLE SPECIFICATIONS TYPE : MC104

- > Flexible PVC Jacket
- > 28 AWG thin and dense stranded conductors
- > Ø 6.0 mm outer diameter
- > Oxygen free copper conductors
- > Braided shielding



CLA724



DESCRIPTION

XLR male to
6.3 mm Jack male stereo

Code	Length
CLA724/1.5	1.5 m
CLA724/3	3 m
CLA724/5	5 m
CLA724/10	10 m

SAME CONNECTIVITY

★★★★★ Basic series : CAB724
★★★★★ Prime series : PRA724

CABLE SPECIFICATIONS TYPE : MC104

- > Flexible PVC Jacket
- > 28 AWG thin and dense stranded conductors
- > Ø 6.0 mm outer diameter
- > Oxygen free copper conductors
- > Braided shielding



CLA725



DESCRIPTION

RCA / Cinch male to
2 x RCA / Cinch male

Code	Length
CAB725/1.5	1.5 m

SAME CONNECTIVITY

★★★★★ Basic series : CAB725

CABLE SPECIFICATIONS TYPE : MC703

- > Flexible PVC Jacket
- > 28 AWG thin and dense stranded conductors
- > Ø 4.0 mm outer diameter
- > Oxygen free copper conductors
- > Spiral shielding





CLA735



DESCRIPTION

XLR female to
2 x XLR male


Code	Length
CLA735/1.5	1.5 m

SAME CONNECTIVITY

★★★★★ Basic series : CAB735
★★★★★ Prime series : PRA735

CABLE SPECIFICATIONS TYPE : SIG155

- > Flexible PVC Jacket
- > 28 AWG thin and dense stranded conductors
- > Ø 5.0 mm outer diameter
- > Oxygen free copper conductors
- > Spiral shielding



CLA736



DESCRIPTION

XLR male to
2 x XLR female


Code	Length
CLA736/1.5	1.5 m

SAME CONNECTIVITY

★★★★★ Basic series : CAB736
★★★★★ Prime series : PRA736

CABLE SPECIFICATIONS TYPE : SIG155

- > Flexible PVC Jacket
- > 28 AWG thin and dense stranded conductors
- > Ø 5.0 mm outer diameter
- > Oxygen free copper conductors
- > Spiral shielding



CLA792



DESCRIPTION

6.3 mm Jack male stereo to
6.3 mm Jack male stereo
Cable set in 6 colors

Code	Length
CAB792/1	1 m

SAME CONNECTIVITY

★★★★★ Basic series : CAB792

CABLE SPECIFICATIONS TYPE : SIG155S

- > Flexible PVC Jacket
- > 28 AWG thin and dense stranded conductors
- > Ø 5.0 mm outer diameter
- > Oxygen free copper conductors
- > Double shielding (Spiral + Al foil)



CLA794



DESCRIPTION

6.3 mm Jack male angled to
6.3 mm Jack male angled

Code	Length
CLA794/01	0.15 m
CLA794/03	0.3 m

CABLE SPECIFICATIONS TYPE : MC104

- > Flexible PVC Jacket
- > 26 AWG thin and dense stranded conductors
- > Ø 6.0 mm outer diameter
- > Oxygen free copper conductors
- > Braided shielding



CLA800



DESCRIPTION

2 x RCA / Cinch male to
2 x RCA / Cinch male

Code	Length
CLA800/0.5	0.5 m
CLA800/1	1 m
CLA800/1.5	1.5 m
CLA800/3	3 m
CLA800/5	5 m
CLA800/10	10 m
CLA800/15	15 m
CLA800/20	20 m

CABLE SPECIFICATIONS TYPE : SIG44

- > Flexible PVC Jacket
- > 28 AWG thin and dense stranded conductors
- > Ø 4 x 8 mm outer diameter
- > Oxygen free copper conductors
- > Spiral shielding



SAME CONNECTIVITY

★★★★★ Basic series : CAB800

CLA830




DESCRIPTION

2 x Terminal block to
2 x Terminal block 3P x 3.81 mm

Code	Length
CLA830/0.25	0.25 m
CLA830/0.5	0.5 m
CLA830/1	1 m
CLA830/1.5	1.5 m
CLA830/3	3 m

CABLE SPECIFICATIONS TYPE : SIG54

- > Flexible PVC Jacket
- > 26 AWG thin and dense stranded conductors
- > Ø 4 x 8 mm outer diameter
- > Oxygen free copper conductors
- > Spiral shielding





CLA832




DESCRIPTION

2 x RCA / Cinch male to
2 x Terminal block 3P x 3.81 mm

Code	Length
CLA832/0.5	0.5 m
CLA832/1	1 m
CLA832/1.5	1.5 m
CLA832/3	3 m

CABLE SPECIFICATIONS TYPE : SIG54

- > Flexible PVC Jacket
- > 26 AWG thin and dense stranded conductors
- > Ø 4 x 8 mm outer diameter
- > Oxygen free copper conductors
- > Spiral shielding



CLA834




DESCRIPTION

2 x XLR male to
2 x Terminal block 3P x 3.81 mm

Code	Length
CLA834/0.5	0.5 m
CLA834/1	1 m
CLA834/1.5	1.5 m
CLA834/3	3 m

CABLE SPECIFICATIONS TYPE : SIG54

- > Flexible PVC Jacket
- > 26 AWG thin and dense stranded conductors
- > Ø 4 x 8 mm outer diameter
- > Oxygen free copper conductors
- > Spiral shielding



CLA835




DESCRIPTION

2 x XLR female to
2 x Terminal block 3P x 3.81 mm

Code	Length
CLA835/0.5	0.5 m
CLA835/1	1 m
CLA835/1.5	1.5 m
CLA835/3	3 m
CLA835/5	5 m

CABLE SPECIFICATIONS TYPE : SIG54

- > Flexible PVC Jacket
- > 26 AWG thin and dense stranded conductors
- > Ø 4 x 8 mm outer diameter
- > Oxygen free copper conductors
- > Spiral shielding



CLA850



DESCRIPTION

2 x RCA / Cinch male to
2 x RCA / Cinch female


Code	Length
CLA850/1.5	1.5 m
CLA850/3	3 m
CLA850/5	5 m

SAME CONNECTIVITY

★★★★★ Basic series : CAB850

CABLE SPECIFICATIONS TYPE : SIG44

- > Flexible PVC Jacket
- > 28 AWG thin and dense stranded conductors
- > Ø 4 x 8 mm outer diameter
- > Oxygen free copper conductors
- > Spiral shielding



CLA900



DESCRIPTION

6.3 mm Jack male to
XLR female

Code	Length
CLA900/3	3 m
CLA900/5	5 m
CLA900/10	10 m

SAME CONNECTIVITY

★★★★★ Basic series : CAB900

★★★★★ Prime series : PRA900

CABLE SPECIFICATIONS TYPE : MC205

- > Flexible PVC Jacket
- > 26 AWG thin and dense stranded conductors
- > Ø 6.0 mm outer diameter
- > Oxygen free copper conductors
- > Braided shielding



CLA901



DESCRIPTION

XLR male to
XLR female

Code	Length
CLA901/0.5	0.5 m
CLA901/1	1 m
CLA901/1.5	1.5 m
CLA901/3	3 m
CLA901/5	5 m
CLA901/10	10 m
CLA901/15	15 m
CLA901/20	20 m
CLA901/25	25 m
CLA901/30	30 m

CABLE SPECIFICATIONS TYPE : MC106

- > Flexible PVC Jacket
- > 24 AWG thin and dense stranded conductors
- > Ø 6.0 mm outer diameter
- > Oxygen free copper conductors
- > Braided shielding



SAME CONNECTIVITY

★★★★★ Basic series : CAB901

★★★★★ Prime series : PRA901



CLA903



DESCRIPTION

XLR male to
XLR female angled

Code	Length
CLA903/1.5	1.5 m
CLA903/3	3 m
CLA903/5	5 m
CLA903/10	10 m

CABLE SPECIFICATIONS TYPE : MC106

- > Flexible PVC Jacket
- > 24 AWG thin and dense stranded conductors
- > Ø 6.0 mm outer diameter
- > Oxygen free copper conductors
- > Braided shielding



CLA904



DESCRIPTION

XLR male angled to
XLR female angled

Code	Length
CLA904/1.5	1.5 m
CLA904/3	3 m
CLA904/5	5 m
CLA904/10	10 m

CABLE SPECIFICATIONS TYPE : MC106

- > Flexible PVC Jacket
- > 24 AWG thin and dense stranded conductors
- > Ø 6.0 mm outer diameter
- > Oxygen free copper conductors
- > Braided shielding



SMART SERIES CABLES

The Smart series is a range of products by PROCAB which is mainly dedicated to all kinds of multimedia connectivity and media accessories. It features products that enable you to get the most out of the multimedia files stored on your personal media players.

These cables and accessories allow you to enjoy your audiovisual files through your home and car entertainment system. Smart cable and connector quality is guaranteed for life.



CIP700

MINI JACK SPEAKER AND HEADPHONE SPLITTER



CIP708

MINI JACK MALE TO MINI JACK MALE

Code	Length
CIP708/2	2 m



CIP712

MINI JACK MALE TO 2 X RCA / CINCH MALE

Code	Length
CIP712/2	2 m

Adapters





CLP101

RCA / CINCH FEMALE TO XLR FEMALE

SAME CONNECTIVITY

★★★★★ Basic series : VC101



CLP102

RCA / CINCH FEMALE TO XLR MALE

SAME CONNECTIVITY

★★★★★ Basic series : VC102



CLP103

RCA / CINCH MALE TO 6.3 MM JACK FEMALE

SAME CONNECTIVITY

★★★★★ Basic series : VC103



CLP104

RCA / CINCH FEMALE TO 6.3 MM JACK MALE

SAME CONNECTIVITY

★★★★★ Basic series : VC104



CLP106

2 X RCA / CINCH FEMALE TO RCA / CINCH MALE

SAME CONNECTIVITY

★★★★★ Basic series : VC106



CLP107

RCA / CINCH FEMALE TO RCA / CINCH FEMALE

SAME CONNECTIVITY

★★★★★ Basic series : VC107



CLP108

2 X RCA / CINCH FEMALE TO 2 X RCA / CINCH FEMALE



CLP110

XLR FEMALE TO 6.3 MM JACK FEMALE BALANCED

SAME CONNECTIVITY

★★★★★ Basic series : VC110



CLP115

XLR MALE TO 6.3 MM JACK FEMALE BALANCED

SAME CONNECTIVITY

★★★★★ Basic series : VC115



CLP120

XLR FEMALE TO 6.3 MM JACK MALE BALANCED

SAME CONNECTIVITY

★★★★★ Basic series : VC120



CLP121

XLR FEMALE TO 6.3 MM JACK MALE

SAME CONNECTIVITY

★★★★★ Basic series : VC121



CLP125

XLR MALE TO 6.3 MM JACK MALE BALANCED

SAME CONNECTIVITY

★★★★★ Basic series : VC125



CLP126

XLR MALE TO 6.3 MM JACK MALE

SAME CONNECTIVITY

★★★★★ Basic series : VC126



CLP130

XLR FEMALE TO RCA / CINCH MALE

SAME CONNECTIVITY

★★★★★ Basic series : VC130



CLP135

XLR MALE TO RCA / CINCH MALE

SAME CONNECTIVITY

★★★★★ Basic series : VC135



CLP140

XLR MALE TO XLR MALE

SAME CONNECTIVITY

★★★★★ Basic series : VC140



CLP145

XLR FEMALE TO XLR FEMALE

SAME CONNECTIVITY

★★★★★ Basic series : VC145



CLP146

PHASE SHIFT XLR MALE TO XLR FEMALE



CLP204 3.5 MM JACK FEMALE STEREO TO
3.5 MM JACK MALE STEREO 90° ANGLED




CLP205 3.5 MM JACK FEMALE STEREO TO
6.3 MM JACK MALE STEREO 90° ANGLED



CLP206 3.5 MM JACK FEMALE STEREO TO
6.3 MM JACK MALE STEREO



CLP208 2 X 3.5 MM JACK FEMALE STEREO TO
6.3 MM JACK MALE STEREO

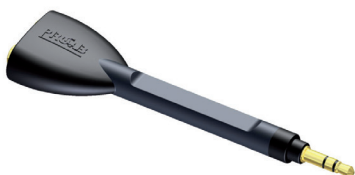


CLP209 2 X 3.5 MM JACK FEMALE STEREO TO
3.5 MM JACK MALE STEREO - FLEXIBLE



CLP210 2 X RCA / CINCH FEMALE TO
6.3 MM JACK MALE STEREO



CLP211 2 X RCA / CINCH FEMALE TO
3.5 MM JACK MALE STEREO



CLP321
SVGA FEMALE TO SVGA FEMALE



CLP341
HDMI FEMALE TO DVI MALE - FLEXIBLE

SAME CONNECTIVITY

★★★★★ Basic series : BSV410



CLP342
HDMI MALE TO DVI FEMALE - FLEXIBLE

SAME CONNECTIVITY

★★★★★ Basic series : BSV400



CLP345
HDMI FEMALE TO HDMI FEMALE

SAME CONNECTIVITY

★★★★★ Basic series : BSP450



CLP157

110 OHM DMX TERMINATOR 3-PIN XLR CONNECTOR



CLP158

110 OHM DMX TERMINATOR 5-PIN XLR CONNECTOR



[illegible]

Classic series packaging



BOX


- › Appealing appearance
- › Environmentally friendly
- › Slim design to fit more cables on your displays
- › Anti-theft
- › Enables users to feel the cable quality



BLISTER

- › Appealing appearance
- › Ensures scratch-free & clean cables
- › Anti-theft

PROCAB merchandising

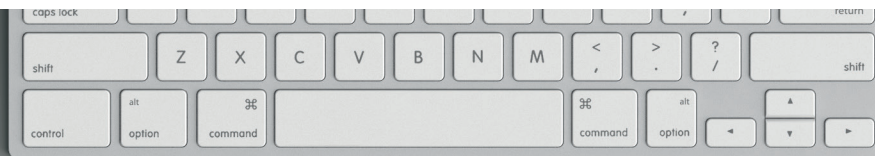

Discover the full PROCAB merchandising range on
procab.be/merchandising

INDEX

CIP700	40	CLA721	33	CLD625	21	CLP208	45
CIP708	40	CLA723	34	CLD953	22	CLP209	45
CIP712	40	CLA724	34	CLD955	22	CLP210	45
CLA530	26	CLA725	34	CLP101	42	CLP211	46
CLA590	26	CLA735	35	CLP102	42	CLP321	46
CLA591	26	CLA736	35	CLP103	42	CLP341	46
CLA595	27	CLA792	35	CLP104	42	CLP342	46
CLA600	27	CLA794	36	CLP106	42	CLP345	46
CLA603	27	CLA800	36	CLP107	42	CLV100	11
CLA610	28	CLA830	36	CLP108	43	CLV104K	12
CLA631	28	CLA832	37	CLP110	43	CLV114	12
CLA650	28	CLA834	37	CLP115	43	CLV115	13
CLA701	29	CLA835	37	CLP120	43	CLV140	13
CLA703	29	CLA850	38	CLP121	43	CLV156	14
CLA705	29	CLA900	38	CLP125	43	CLV158	14
CLA707	30	CLA901	38	CLP126	44	CLV160	15
CLA708	30	CLA903	39	CLP130	44	CLV200	11
CLA709	30	CLA904	39	CLP135	44	FBL130	23
CLA710	31	CLD400	19	CLP140	44	FBS125	23
CLA711	31	CLD500	19	CLP145	44		
CLA712	31	CLD600	19	CLP146	44		
CLA713	32	CLD605	20	CLP157	47		
CLA716	32	CLD610	20	CLP158	47		
CLA718	32	CLD612	20	CLP204	45		
CLA719	33	CLD614	21	CLP205	45		
CLA720	33	CLD615	21	CLP206	45		

PRIME SERIES



The Prime premade series from PROCAB offers you the highest class in cables. This series is specifically designed to withstand the harshest use and abuse that any rental and road application can throw at them. All connections are equipped with the highest quality connectors. Equipped with reliable Neutrik and PROCAB plugs, it ensures the most trustworthy communication. Besides the top-quality black connectors, the cables used in this series are designed to meet the highest standards. With the Highflex™, Ultraflex™ and Duraflex™ technologies implemented in the cables it provides you the right flexibility and solid feel when you need it most.

CLASSIC SERIES



The Classic premade series from PROCAB offers a stunning line of cables and adapters that will satisfy any AV integrator. Not only the design but also the quality of the cables themselves is unheard of in its price range. The advantage of gold plated contacts and the connectors that are molded firmly on the cable make this the ideal solution for fixed installations and mobile use.

BASIC SERIES



The BASIC premade cable series from PROCAB consists of a complete line of audio, video and data cables that you will need in your installations. These reasonably priced cables can be used for fixed installations as well as mobile applications. The connectors used in this range consist out of a combination of molded and solder connections. Combined with the flexibility of the cables themselves, makes this series ideal to fit in a very wide range of applications.

procab.be



AUDIO



VIDEO



DIGITAL



POWER